

DSP255II Waterproof Column Speaker

Features



- Outdoor design, waterproof unit, suit for outdoor and indoor. Support working at high temperate up to 60 degrees.
- Small and elegant appearance, suit for all kind of decoration place.
- With 3 "Gray polypropylene drum paper full frequency cone-type bass unit and 2" treble unit combination, frequency response wide, bass level clear, treble clear and bright.
- With power tap, independently adjustable, multiple choices of input mode.
- Solid aluminum alloy box, not easy to deformation and rust.
- E type pure copper wire audio transformer to ensure fidelity of audio output.
- Equipped with multifunctional mounting bracket, convenient


Description

The speaker DSP255II is made of aluminum alloy housing, with a fine, with surface UV Antiultraviolet paint treatment, with a strong textured appearance and capable of providing professional levels.


The sound performance can meet the demanding requirements of the site.

Specification


Model	DSP255II	DSP455II
Speaker unit	3"×2, 2"×1	3"×4, 2"×1
Rated power (RMS)	30W	60W
Freq.Response	140Hz-20kHz	140Hz-20kHz
Sensitivity (1m,1W)	87±3dB	89±3dB
Max SPL (1m)	102±3dB	107±3dB
Dimension (L×W×H)	376×109×102mm	606×109×102mm
Net weight	3kg	4kg

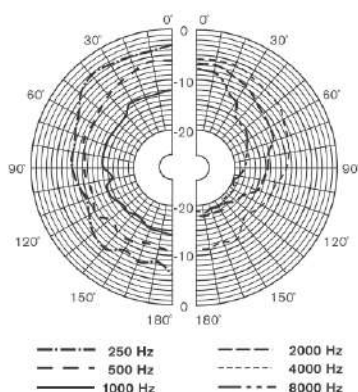


DSP255II Vertical directivity pattern

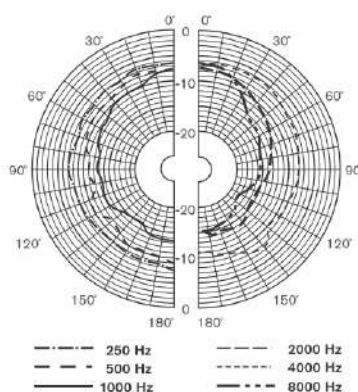

DSP255II Horizontal directional pattern

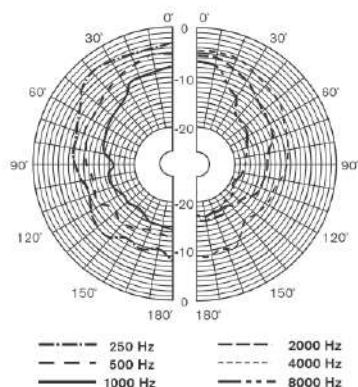


DSP455II Vertical directivity pattern

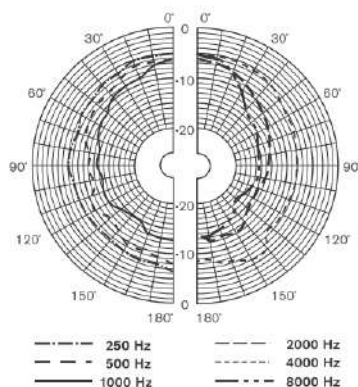


DSP455II Horizontal directional pattern

DSP255II Freq.Response

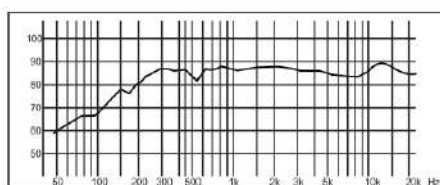


DSP455II Freq.Response

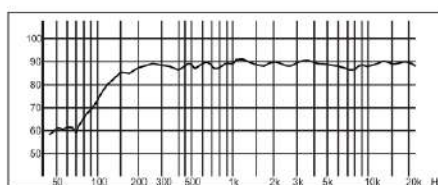

DSP255II Distortion

(THD< 5% 1W, 1m, 100Hz-10kHz)

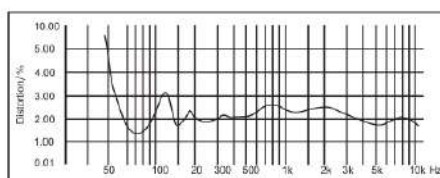

DSP455II Distortion

(THD<5% 1W, 1m, 100Hz-10kHz)

